

ENTRANCE AUTOMATION & ACCESS CONTROL

A better way to make an entrance.

Italian imported automation. Thoughtful system selection.
For homes, commercial spaces and industrial entrances.



4,000

kg sliding gates

1,000

kg / swing leaf

7 m

boom barrier range

Maximum capacities across the range. System selection is project-specific.

GATES / AUTOMATIC DOORS / BARRIERS / ACCESS CONTROL / RFID

Cover: architectural concept visual. Product illustrations throughout are indicative.

01 / GATE AUTOMATION

Sliding gate automation

A practical solution for entrances where the gate travels sideways along the boundary.



4,000 kg gate weight

UP TO / MAXIMUM AVAILABLE RANGE

01 Where it fits

Residential driveways, farmhouses, factories, warehouses and commercial premises.

02 What we review

Gate weight and width, free manual movement, run-back space and expected daily cycles.

BUILD THE RIGHT CONFIGURATION


Select the motor, controls and safety accessories around the actual entrance. Options include remote operation, local controls and compatible access integration.

Capacity depends on the selected model and installation conditions. Gate dimensions, duty cycle and safety requirements must be checked.

02 / GATE AUTOMATION

Swing gate automation

An elegant opening for single-leaf or double-leaf gates with clear space to swing.

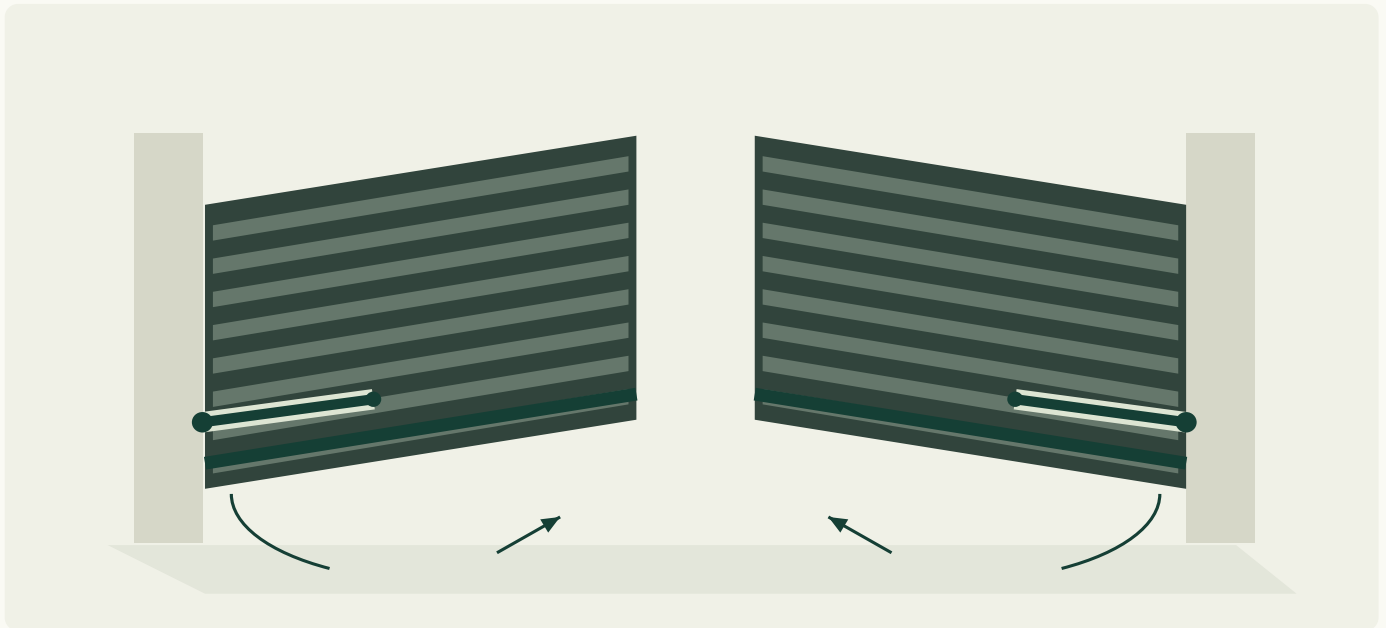

1,000 kg per leaf

UP TO / MAXIMUM AVAILABLE RANGE

01 Where it fits

Villas, bungalows, farmhouses, commercial properties and industrial swing entrances.

02 What we review

Each leaf's weight and length, hinge geometry, swing clearance, usage and fixing areas.

COORDINATE MOVEMENT EARLY


Bring the gate fabricator and project team into the selection discussion. Operator choice and mounting details should suit the gate geometry and site conditions.

The maximum leaf weight is a range limit, not a rating for every leaf length. Final specification is model- and project-dependent.

03 / PEDESTRIAN ENTRANCES

Automatic door systems

Sliding and swing glass door automation for a welcoming, sensor-operated entrance.

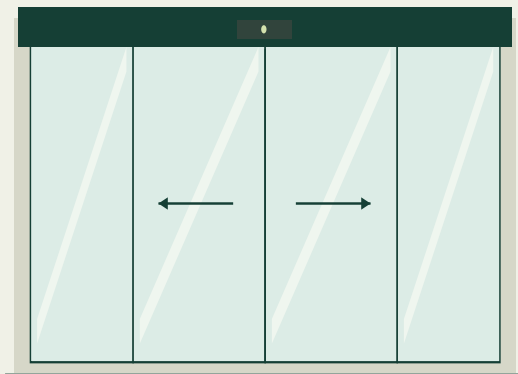


AUTOMATIC SLIDING GLASS DOOR OPERATORS

SLIDING DOORS

**Sideways movement.
A seamless arrival.**

For showrooms, offices, hotels and healthcare entrances where a sliding layout suits the opening.

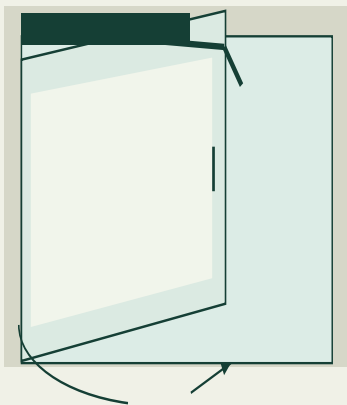

AUTOMATIC SWING DOOR OPERATORS

SWING DOORS

**Familiar movement.
Automated operation.**

For suitable hinged glass entrances, with operator and activation options selected for the project.

PLAN THE OPENING


Review leaf sizes and weight, clear opening, pedestrian traffic, activation devices, safety detection, power and mounting provisions.

Door capacities, dimensions and operating performance are confirmed for the selected system.

04 / VEHICLE ACCESS

Boom barrier systems

Organise vehicle entry and exit at shared, commercial and industrial premises.

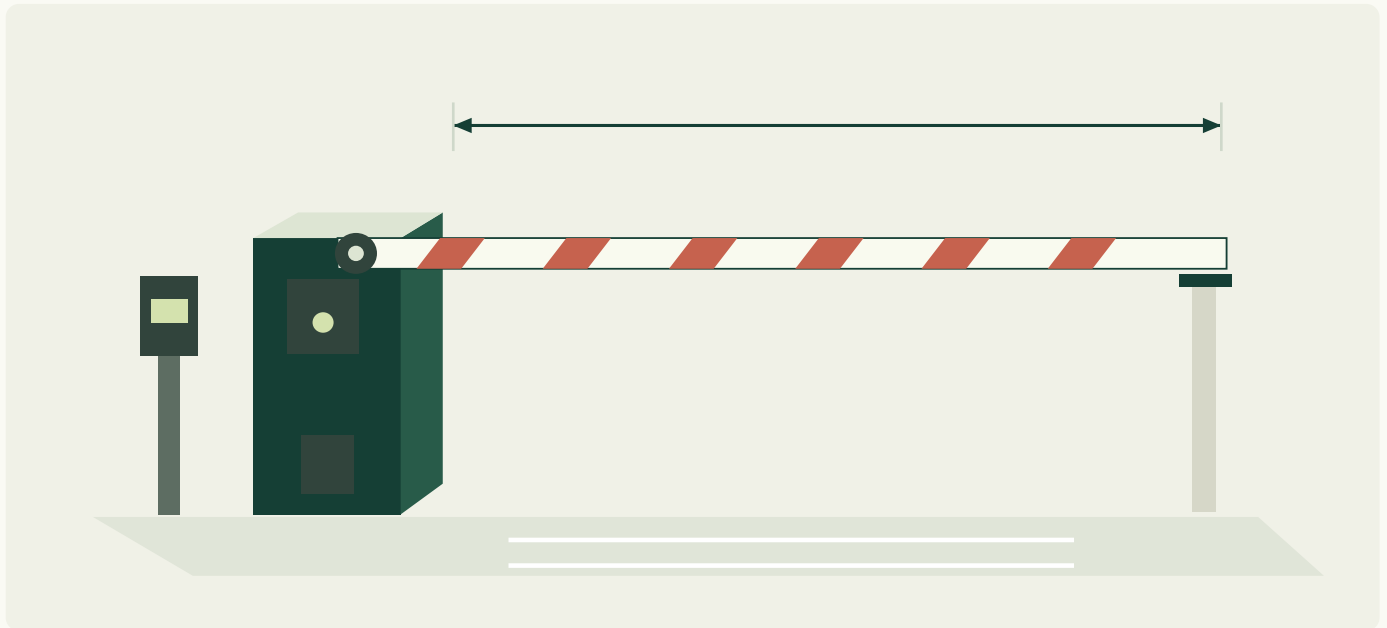

7 metres boom length

UP TO / MAXIMUM AVAILABLE RANGE

01 Where it fits

Housing societies, office campuses, car parks, factories and controlled vehicle lanes.

02 What we review

Lane width, traffic frequency, opening needs, reader position and safety provisions.

PAIR WITH THE RIGHT ACCESS CONTROL


Choose local push-button control, remote operation or a compatible RFID access arrangement. Coordinate vehicle detection and pedestrian movement for the site.

Boom length, speed, duty cycle and accessories vary by model. Final configuration follows the lane and usage requirements.

05 / ACCESS CONTROL PRODUCTS

Choose how you enter.

From a fixed push button to connected building control, match the interface to your users.



Push buttons

Simple local operation from a fixed control point.




Remote controls

Convenient operation through a handheld transmitter.




Wi-Fi modules

App-based operation using a compatible Wi-Fi control module.



Key selectors

Key-operated control at a dedicated access point.



KNX INTEGRATION


Connect a compatible entrance system with smart home or building controls. Review the interface and control requirements during specification.

RFID is featured separately on the next page. Control compatibility and integration scope are confirmed for the selected automation system.

06 / STANDALONE PRODUCT RANGE

RFID access solutions

Manage authorised entry using compatible RFID readers, cards and tags.

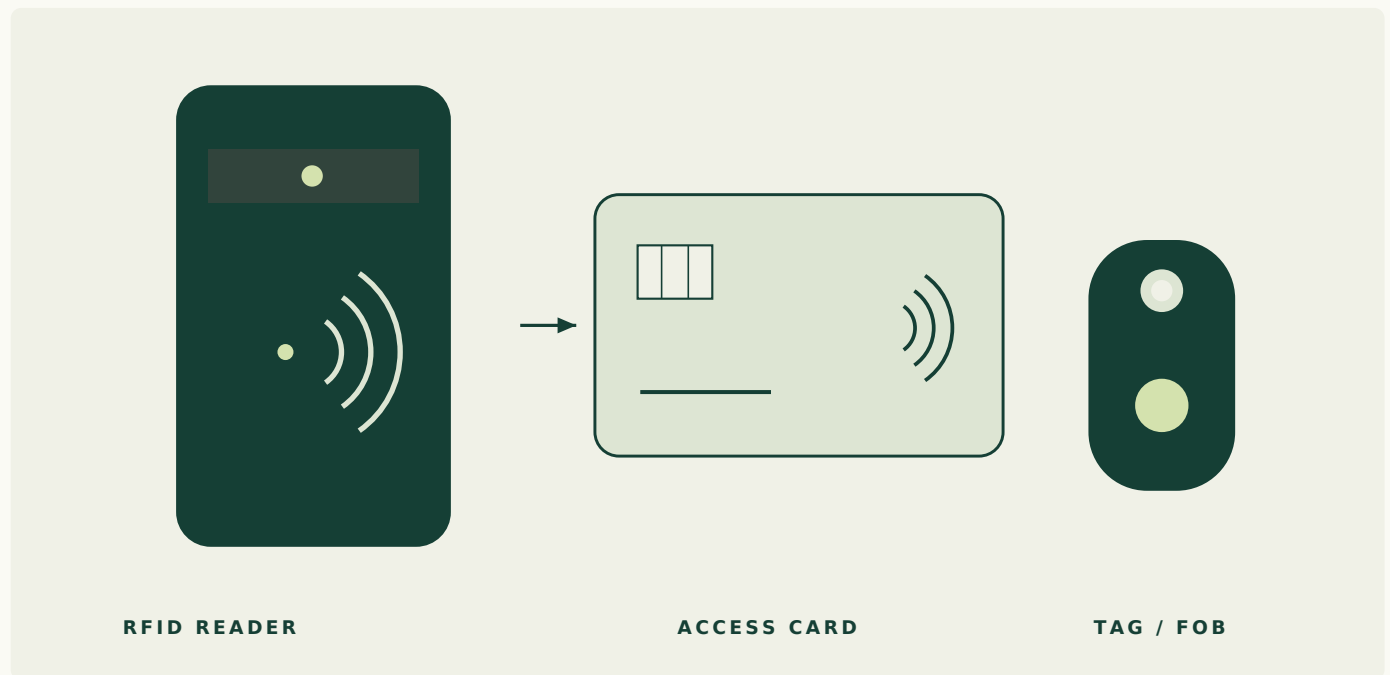

A clear access point.

Specify RFID as a dedicated access control requirement, with the reader, credentials and interface selected to work together.

01 For vehicle entry

Discuss compatible RFID control for boom barriers and automated driveway gates.

02 For controlled access

Review authorised user needs, reader placement and the required control interface.

SPECIFY BEFORE SELECTING

Confirm the credential type, reader technology, reading distance, controller and automation compatibility for your project.

RFID features and integration capabilities depend on the chosen products and agreed scope.

FOR OWNERS, ARCHITECTS & CONSULTANTS

Your entrance. Our technical perspective.

Bring us your idea, site photos or drawings. We will help you explore suitable automation, controls and project provisions.

01 Understand the site

Opening, movement, expected usage and access needs.

02 Select the system

A suitable product range, controls and safety accessories.

03 Coordinate the project

Power, wiring, mounting details and installation scope.

04 Support the handover

Operating information and product-related guidance.

FOR A USEFUL QUOTATION, SHARE

Site location / Opening dimensions / Photos or drawings
Gate or door weight, if known / Expected daily usage

LET'S DISCUSS YOUR PROJECT

+91 92535 53381

marketing@mechanocart.in

Delhi NCR | Pan India



SCAN TO ENQUIRE